


HOW TO SET UP MYQ-SEE DDNS FOR Q-SEE DVR SYSTEMS


MODEL NUMBERS: QT-Series

Prior to setting up DDNS for your DVR, your DVR must be set up for remote viewing.

STEP 1: Go to <http://myq-see.com/>.

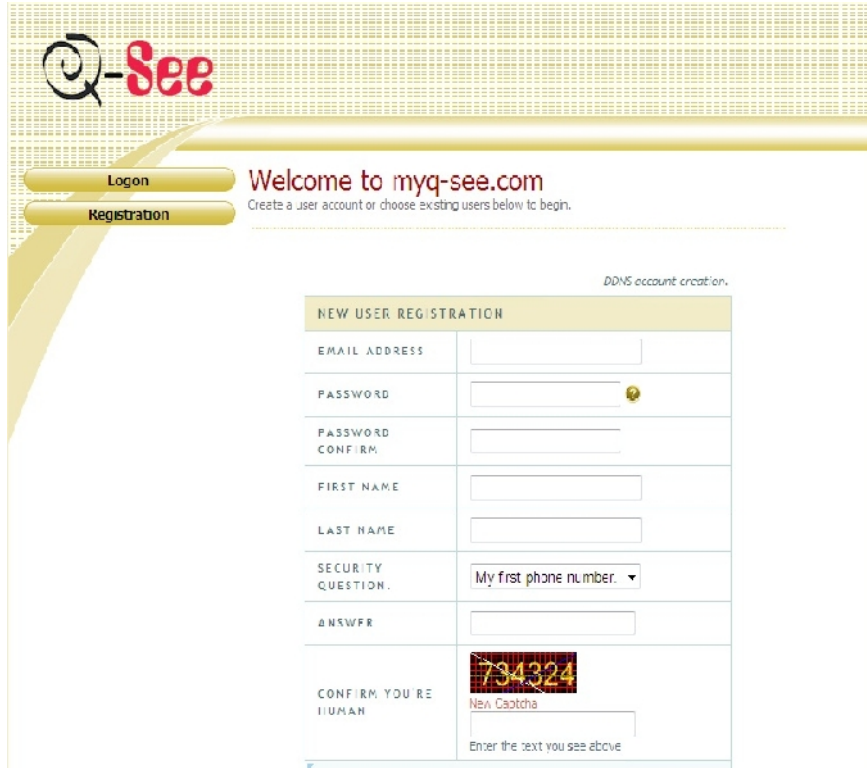

The screenshot shows the myq-see.com website interface. At the top left is the myq-see logo. Below it are two buttons: "Logon" and "Registration". To the right of these buttons is a welcome message: "Welcome to myq-see.com" followed by the instruction "Create a user account or choose existing users below to begin." Below this is a "NEW USER REGISTRATION" form with the following fields:

NEW USER REGISTRATION	
EMAIL ADDRESS	<input type="text"/>
PASSWORD	<input type="password"/>
PASSWORD CONFIRM	<input type="password"/>
FIRST NAME	<input type="text"/>
LAST NAME	<input type="text"/>
SECURITY QUESTION	My first phone number. ▼
ANSWER	<input type="text"/>
CONFIRM YOU'RE HUMAN	 New Captcha <input type="text"/> Enter the text you see above

STEP 2: Enter all the informations to create your Domain Name. Once the Domain Name successfully created, make notes on:

User Name : your full email address.

Password.

Domain Name: xxxxx.myq-see.com

HOW TO SET UP MYQ-SEE DDNS FOR Q-SEE DVR SYSTEMS

MODEL NUMBERS: QT-Series

STEP 3: Click on the Menu icon




STEP 4: Go to SETUP and NETWORK menu.




HOW TO SET UP MYQ-SEE DDNS FOR Q-SEE DVR SYSTEMS

MODEL NUMBERS: QT-Series

STEP 5: Note: You have to have the Port Forwarding setup done and you should be able to connect to your DVR remotely from internet using the WAN ip address. If you have not done with Port forwarding setup, STOP here, and follow the instruction on How to Setup the Network manual. If you have been able to connect to your DVR remotely, then you want to make sure that on the DNS address below, you have to put the correct DNS address that you can find in the Router Status Tab or call your ISP.

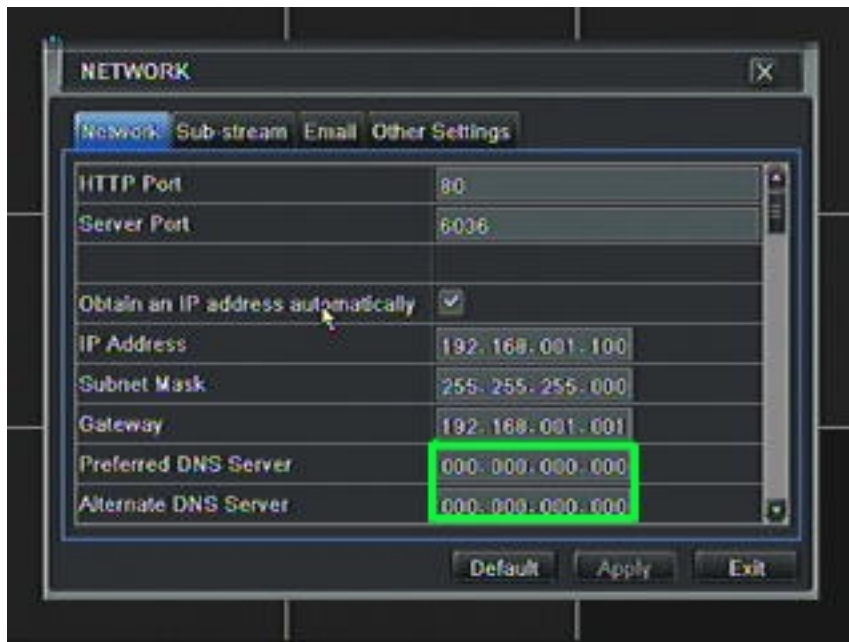


Example of Primary DNS in the Router status information:

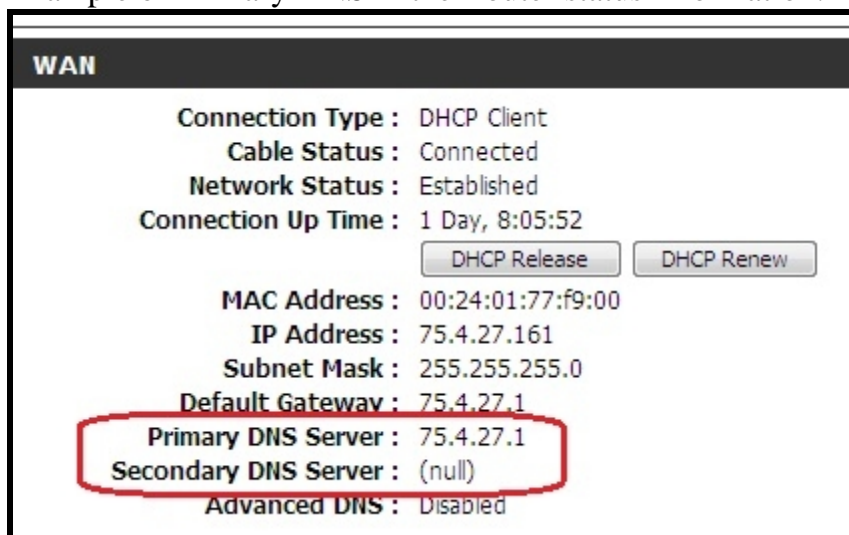

HOW TO SET UP MYQ-SEE DDNS FOR Q-SEE DVR SYSTEMS

MODEL NUMBERS: QT-Series

STEP 6: In the NETWORK Menu, Click on Other Setting tab. Enable DDNS and put all informations here. Click on Test button. If it say Success, then click Apply and Exit.

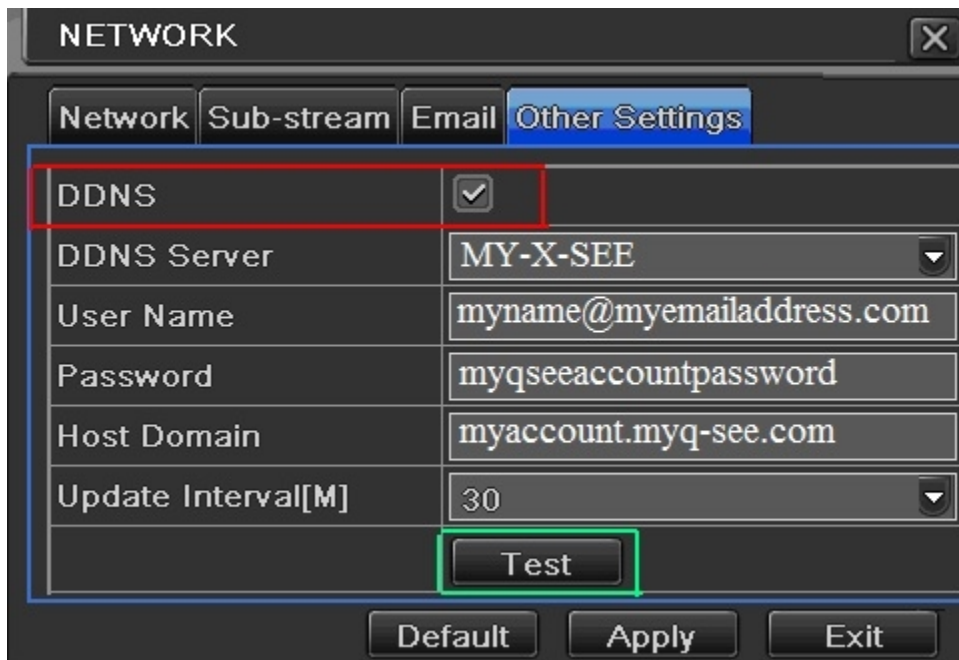

The screenshot shows the 'NETWORK' menu with the 'Other Settings' tab selected. The 'DDNS' checkbox is checked. The configuration fields are as follows:

Field	Value
DDNS	<input checked="" type="checkbox"/>
DDNS Server	MY-X-SEE
User Name	myname@myemailaddress.com
Password	myqseeaccountpassword
Host Domain	myaccount.myq-see.com
Update Interval[M]	30

At the bottom of the form, there are three buttons: 'Default', 'Apply', and 'Exit'. The 'Test' button is highlighted with a green box.